


GoProtect SIMPLE SOLUTIONS

Grout Sealer

A High Performance Water Repellency Protection

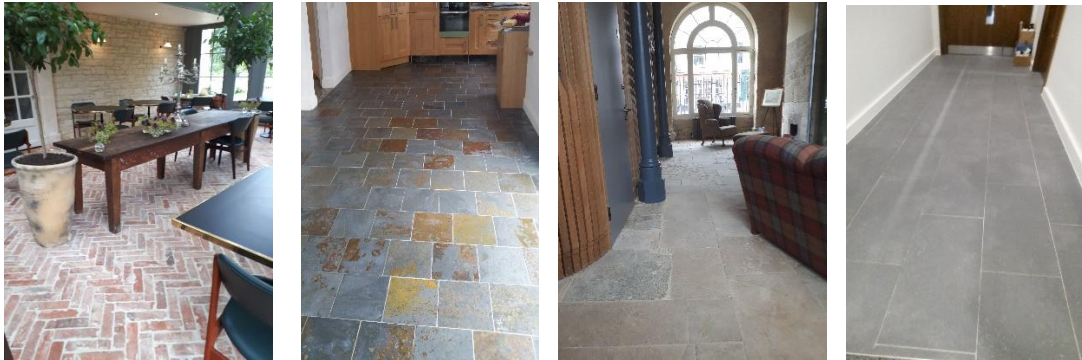

PRODUCT DESCRIPTION

A penetrating water borne sealer for porous grouting joints giving extended protection against water penetration

USES

Suitable for all porous grout and mortar joints.

Provides excellent protection against both water +moisture penetration plus Fuel and Oil spillages

Reduces the likelihood of algae growth

A treated surface remains breathable enabling residual moisture to escape as vapour

Ideal treatment for the underside of floor tiles before installation, preventing ingress of moisture from underneath.

PACKAGING

500ml Sprayers

PHYSICAL PROPERTIES

Invisible once dry

Solvent and silicone-free

Non-hazardous and safe to use

Water borne product

VOC content: >1 gm/L

UV-resistant

Consistency: Low viscosity liquid

Fully biodegradable

Density: 1.0kgs/litre @ 25°C.

Colour: Pale Straw

Lubelska Limited, 71-75 Shelton Street, London WC2 9JQ
Tel: 0203911 5526. E-mail: info@goprotect.co

Odour: Mild, soapy

Chemical resistance: Dilute acids & alkalis

APPLICATION

'Always test apply on a small hidden portion of the substrate'

Ensure surface to be treated is clean and free of all dust, soiling, organic growth and salt deposits

Surface and air temperature need to be >10°C

Do not apply externally during damp and wet weather or if rain is imminent and avoid applying to hot surfaces >40°C or in strong, direct sunlight.

Shake well before use.

Ensure the surface is visibly dry before application

COVERAGE RATE

The figures below are approximate and should be used only as a general guideline:

2-3 m² / 500 ml.

EQUIPMENT CLEANING

Immediately after you have finished, clean all tools and equipment with water.

STORAGE & SHELF LIFE

Keep in a dry place (between 5°C and 30°C).

Storage: 24 months following the production date when kept in the original unopened container.

RECOMMENDATIONS

Do not use below 4°C. Avoid use in rainy conditions.

HEALTH & SAFETY

See Material Safety Data Sheet before use.

Important: The content of this documentation is based on our experience of the product. Lubelska Ltd. guarantees the quality of its products, but expressly declines any liability in the event of failure by the user to comply with the recommendations and conditions of use of said products, notably but not exclusively in the event of incorrect application, application by unqualified personnel, use of products not compatible with Lubelska's products or bad weather conditions. For further information, refer to the safety data sheet.

LUBELSKA PRODUCT CODE: R-28